

HIGH GLOSS



Class in every Square

Collection_2023



About us /

At Top-notch tiles, building quality is our top priority, and it speaks for itself. Since our establishment in 2010, we have remained committed to delivering superior products to our valued clients. We understand that quality starts right from the selection of the finest raw materials for our products and continues throughout the entire manufacturing process. Our skilled labour meticulously oversees every step of production, ensuring that each product meets our high standards. We believe in the power of micro management to maintain consistent quality and address any potential issues promptly.

Innovation is at the core of our company's values, and our dedicated Research and Development team continuously explores new surfaces and designs. By closely examining various application aspects, we create dynamic designs and vibrant colors that captivate the senses. With a strong focus on quality and innovation, we take pride in offering products that not only meet but exceed our clients' expectations.

Our commitment to excellence drives us to deliver exceptional building materials that stand the test of time and enhance the aesthetic appeal of any project.



www.topnotchtiles.com



Message from Directors:

|

Top-notch tiles operates its manufacturing plant in India, along with corporate offices in London and Ahmedabad. We take great pride in our ability to deliver an exceptional level of service satisfaction to our valued clients. At the core of our operations is a relentless commitment to exceeding customer expectations.

We believe in going above and beyond to ensure that our clients receive the highest level of service possible. Our dedication to providing an optimum level of service sets us apart from others in the industry. When you choose our company, you will experience the difference in our unwavering commitment to meeting your needs. We strive to build long-lasting relationships with our clients by delivering exceptional service, prompt communication, and reliable support. Your satisfaction is our top priority, and we work tirelessly to ensure that we consistently meet and exceed your expectations.

Whether you require our products or services, you can trust us to provide an unparalleled level of commitment and dedication. We are confident that once you experience our level of service, you will see why we stand out from the competition.



Available
Format /






Available
Thickness /




9mm

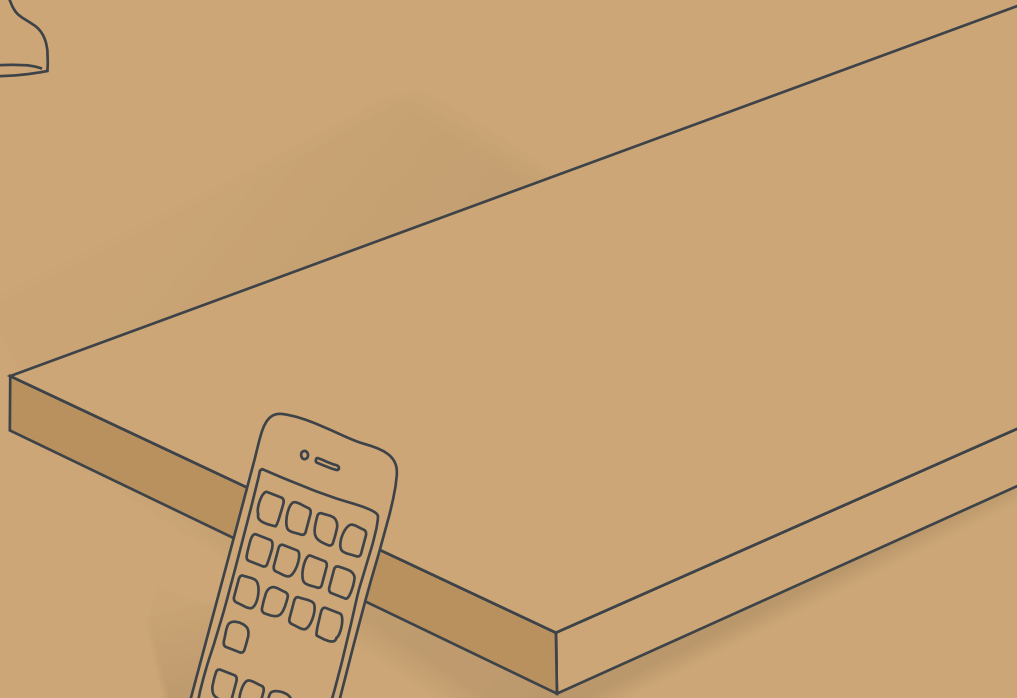


△ FINISHES
 HIGH GLOSS

≡ THICKNESS
 9 MM

↔ FORMAT

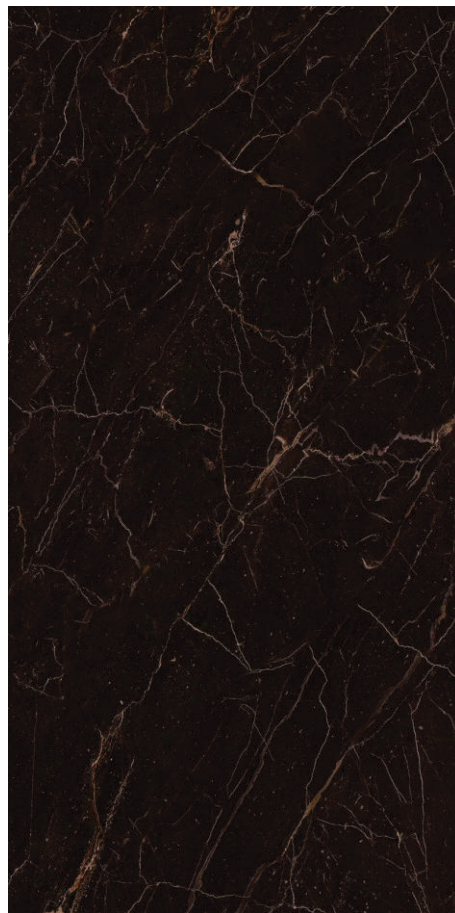



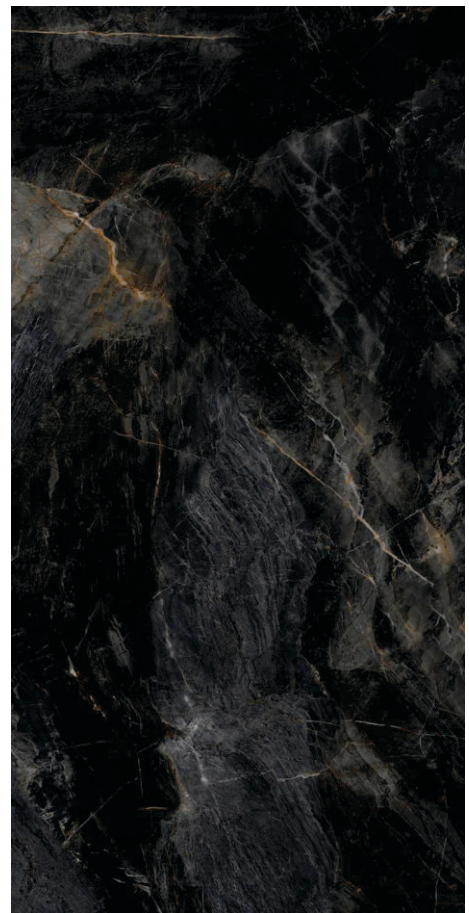






ASCORT BROWN




ASTERIX

PORCELAIN
 STONEWARE

-  HIGH MODULE OF BREAKAGE
-  RESISTANCE TO FROST
-  RESISTANCE TO ABRASION
-  LOW THERMAL EXPANSION
-  RESISTANT TO STAINS
-  LOW ABSORPTION
-  RESISTANT TO CHEMICAL
-  MINIMUM DEVIATION FROM EDGE
-  UNDER FLOOR HEATING



COSTA GOLDEN

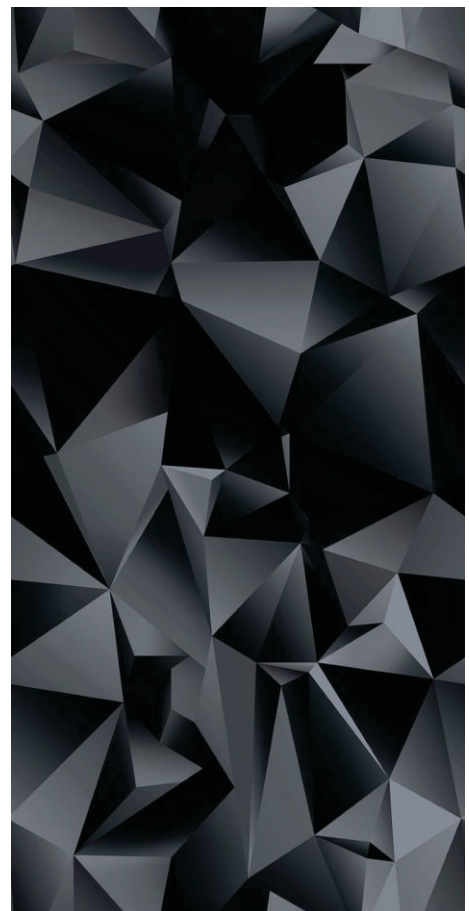

CRISSEL BLACK


FINISHES
 HIGH GLOSS

THICKNESS
 9 MM

FORMAT




DEMARTINO

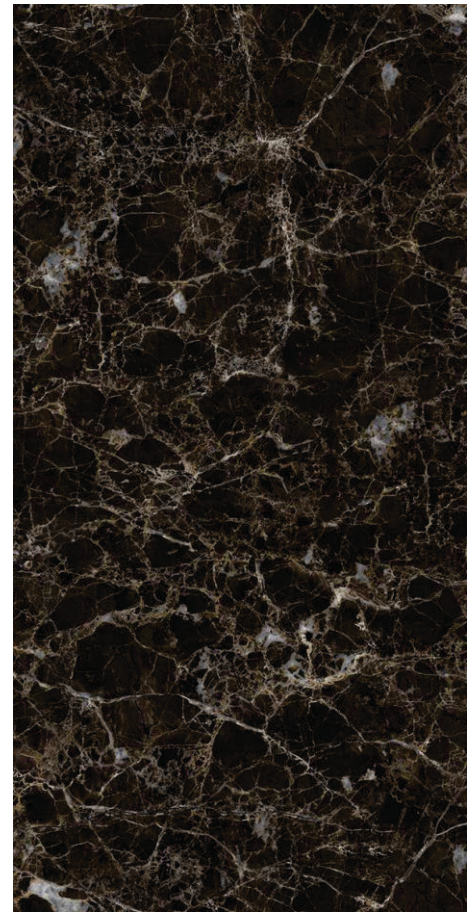


EMPERADOR CHOCO

PORCELAIN
 STONEWARE

-  HIGH MODULE OF BREAKAGE
-  RESISTANCE TO FROST
-  RESISTANCE TO ABRASION
-  LOW THERMAL EXPANSION
-  RESISTANT TO STAINS
-  LOW ABSORPTION
-  RESISTANT TO CHEMICAL
-  MINIMUM DEVIATION FROM EDGE
-  UNDER FLOOR HEATING



ESTORIA

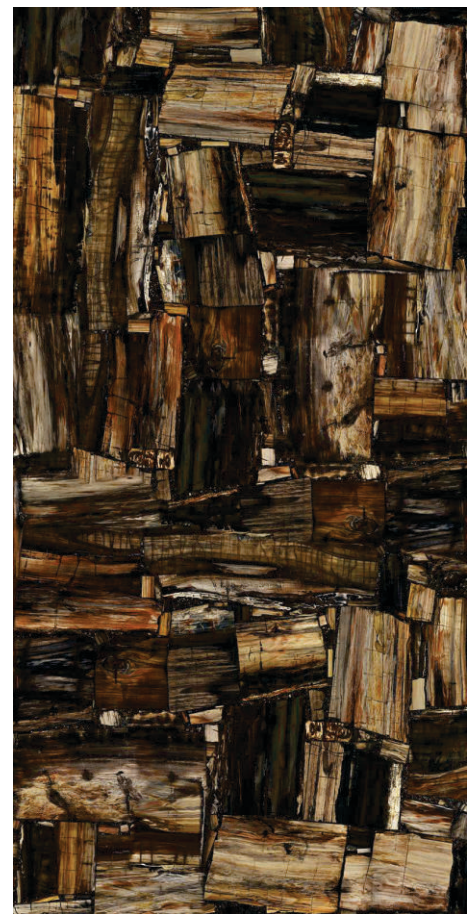


ETHNIC BROWN


△ FINISHES
 HIGH GLOSS

≡ THICKNESS
 9 MM

↔ FORMAT

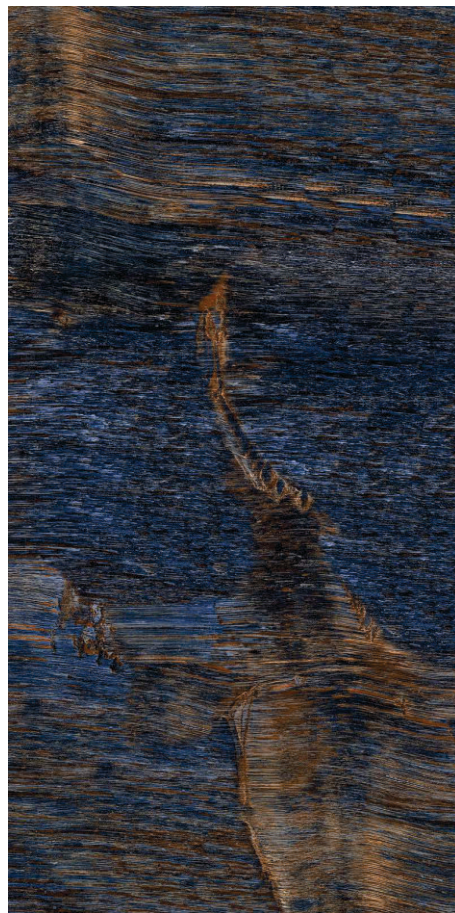



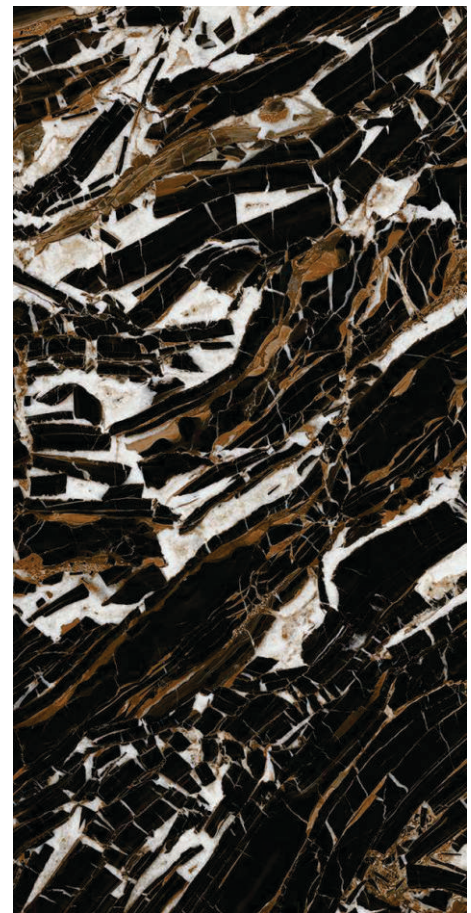






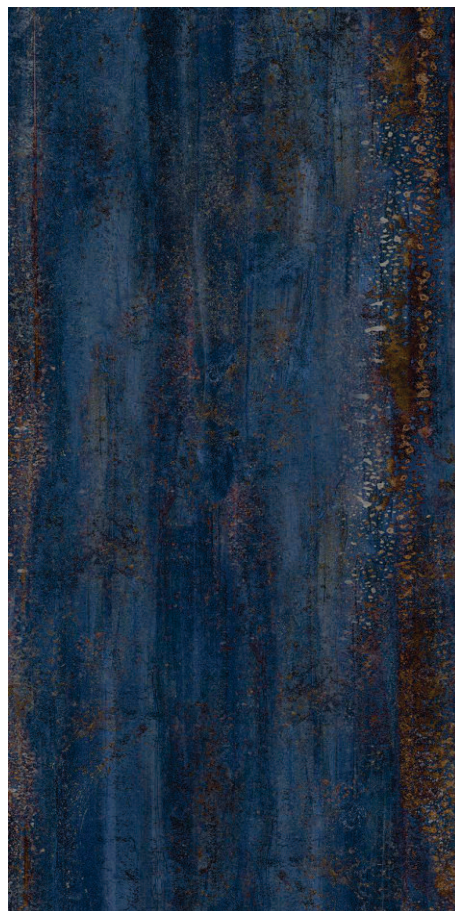
FOREST BLUE



FRACTAL GOLD

PORCELAIN
 STONEWARE

-  HIGH MODULE OF BREAKAGE
-  RESISTANCE TO FROST
-  RESISTANCE TO ABRASION
-  LOW THERMAL EXPANSION
-  RESISTANT TO STAINS
-  LOW ABSORPTION
-  RESISTANT TO CHEMICAL
-  MINIMUM DEVIATION FROM EDGE
-  UNDER FLOOR HEATING



HELMER BLUE




HILTON BROWN


△ FINISHES
 HIGH GLOSS

≡ THICKNESS
 9 MM

↔ FORMAT

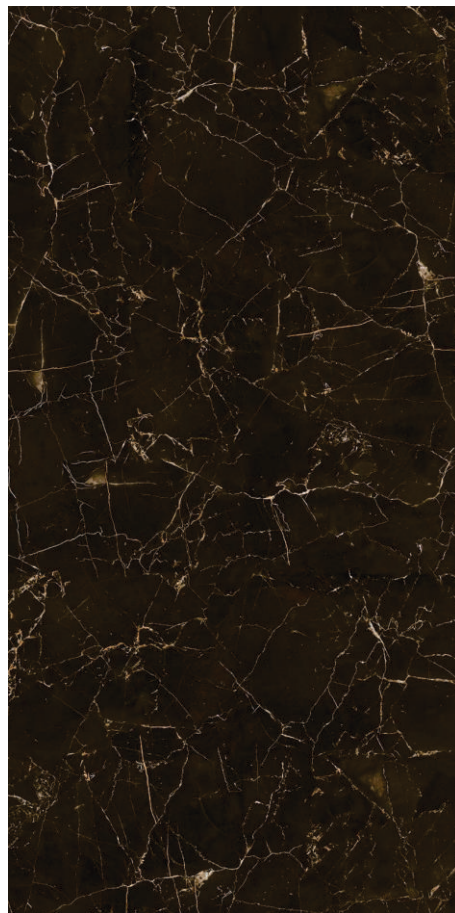



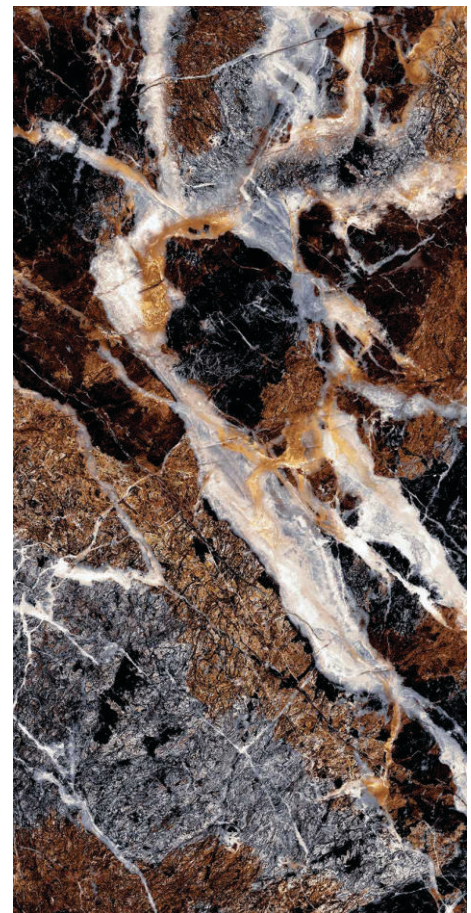






IBERICO BROWN




INCREDIC

PORCELAIN
 STONEWARE

-  HIGH MODULE OF BREAKAGE
-  RESISTANCE TO FROST
-  RESISTANCE TO ABRASION
-  LOW THERMAL EXPANSION
-  RESISTANT TO STAINS
-  LOW ABSORPTION
-  RESISTANT TO CHEMICAL
-  MINIMUM DEVIATION FROM EDGE
-  UNDER FLOOR HEATING



INFINITY BROWN

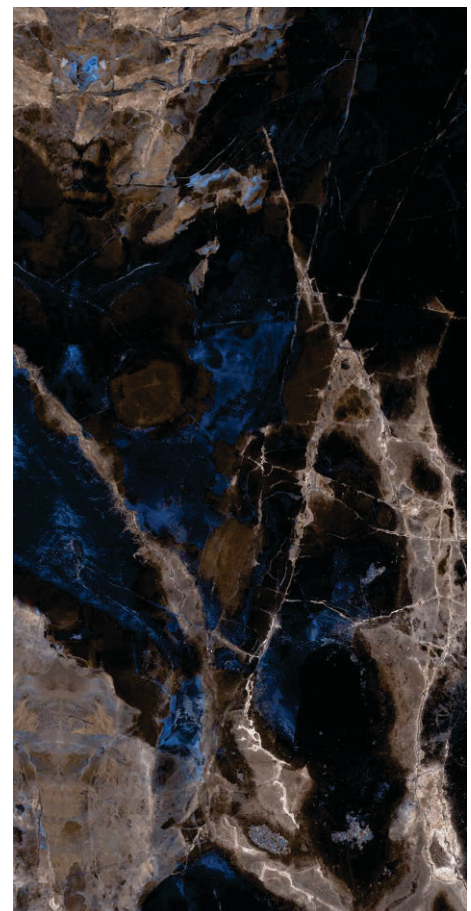

INVISIBLE

△ FINISHES
 HIGH GLOSS

≡ THICKNESS
 9 MM

↔ FORMAT












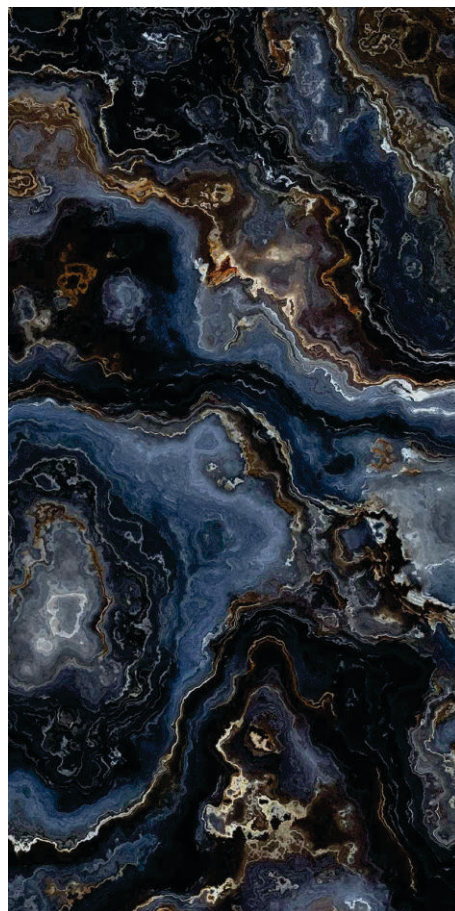
LEXA BLACK



OCEAN WAVE

**PORCELAIN
 STONEWARE**

-  HIGH MODULE OF BREAKAGE
-  RESISTANCE TO FROST
-  RESISTANCE TO ABRASION
-  LOW THERMAL EXPANSION
-  RESISTANT TO STAINS
-  LOW ABSORPTION
-  RESISTANT TO CHEMICAL
-  MINIMUM DEVIATION FROM EDGE
-  UNDER FLOOR HEATING



OXELL BLUE




RAINFORREST WHITE

△ FINISHES
 HIGH GLOSS

≡ THICKNESS
 9 MM

↔ FORMAT

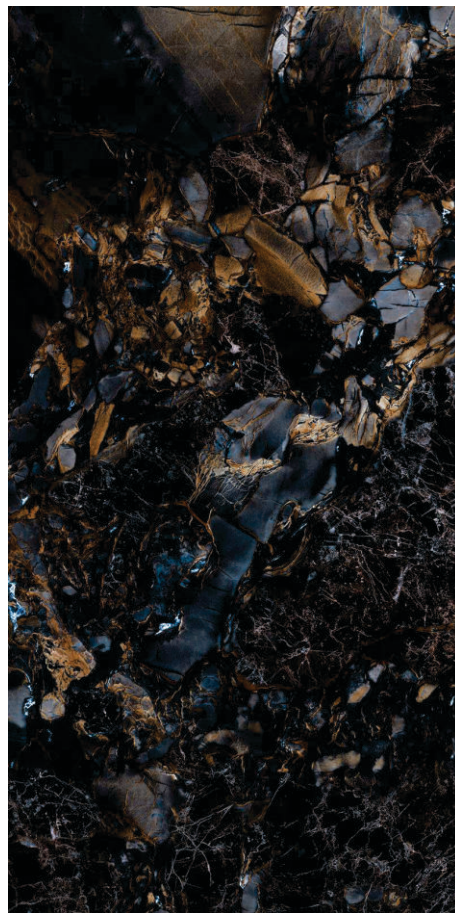










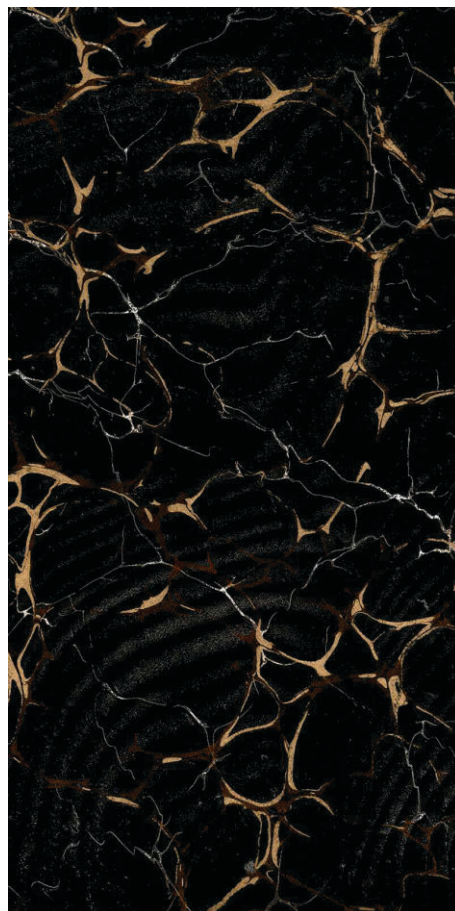
ROYAL OPERA




SAHARA NOIR

PORCELAIN
 STONEWARE

-  HIGH MODULE OF BREAKAGE
-  RESISTANCE TO FROST
-  RESISTANCE TO ABRASION
-  LOW THERMAL EXPANSION
-  RESISTANT TO STAINS
-  LOW ABSORPTION
-  RESISTANT TO CHEMICAL
-  MINIMUM DEVIATION FROM EDGE
-  UNDER FLOOR HEATING



SILK VITRUM

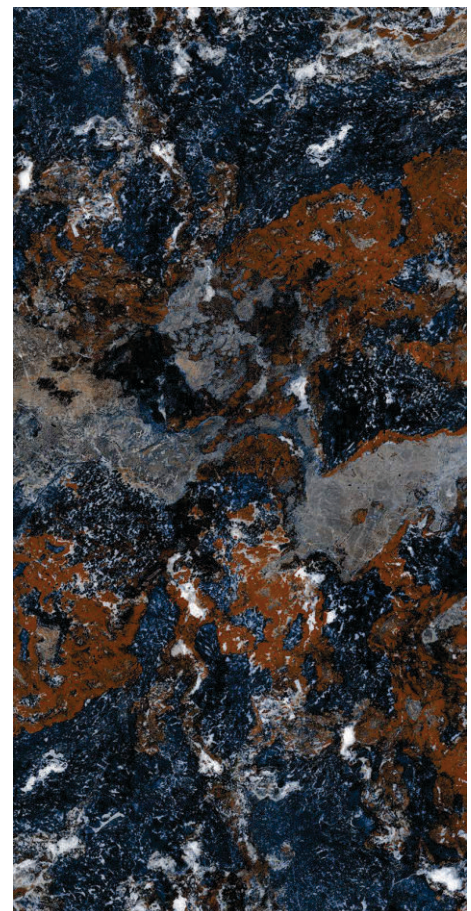


SLATE STONE


△ FINISHES
 HIGH GLOSS

≡ THICKNESS
 9 MM

↔ FORMAT

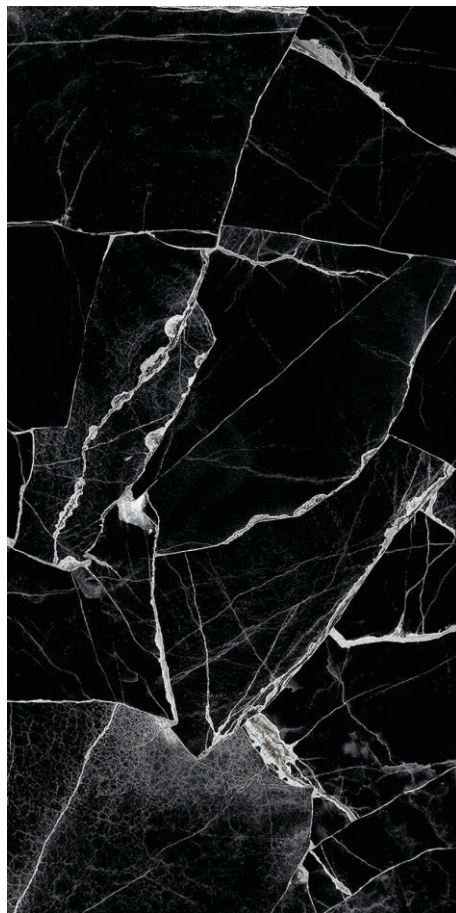



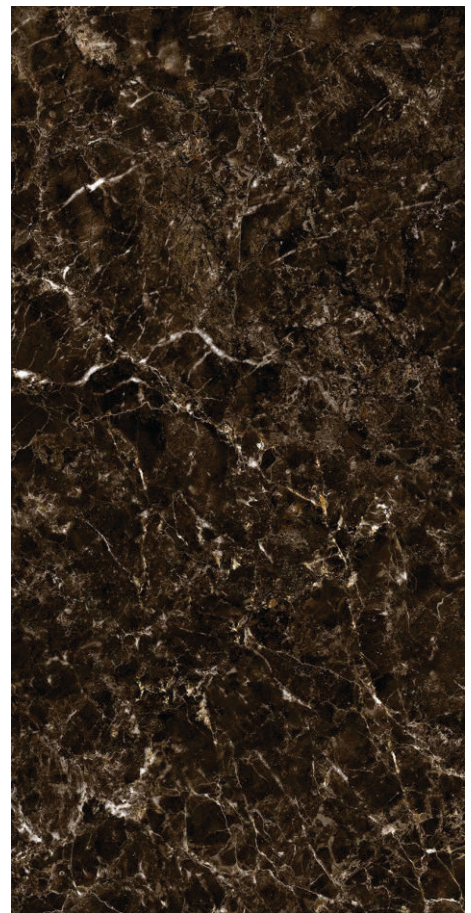






SPARTEN BLACK




STRATOS

PORCELAIN
 STONEWARE

-  HIGH MODULE OF BREAKAGE
-  RESISTANCE TO FROST
-  RESISTANCE TO ABRASION
-  LOW THERMAL EXPANSION
-  RESISTANT TO STAINS
-  LOW ABSORPTION
-  RESISTANT TO CHEMICAL
-  MINIMUM DEVIATION FROM EDGE
-  UNDER FLOOR HEATING



THOMAS ONYX

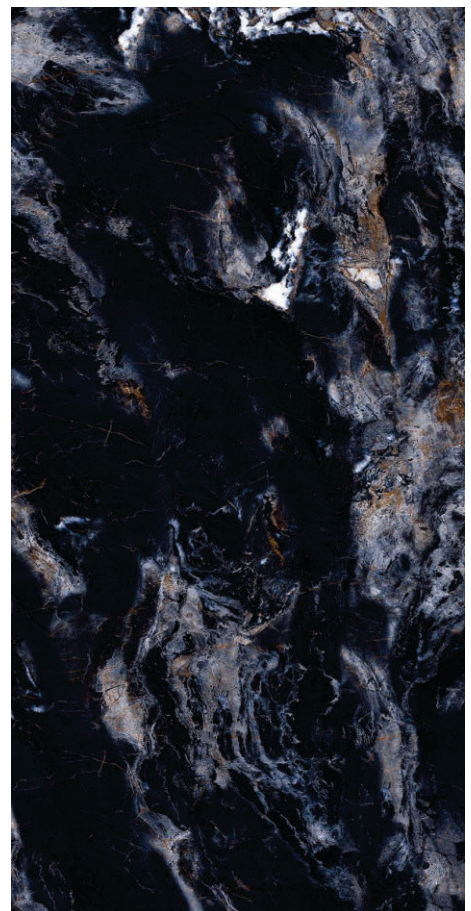


THUNDER SMOKE BLACK

△ FINISHES
 HIGH GLOSS

≡ THICKNESS
 9 MM

↔ FORMAT

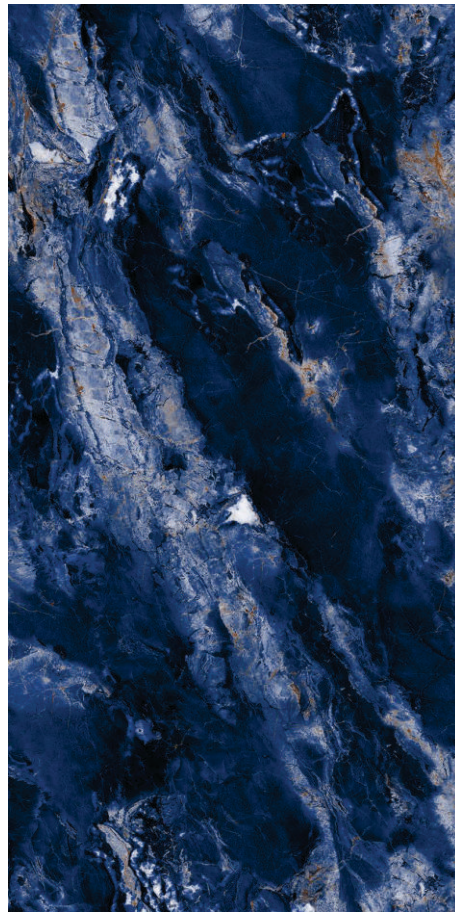










THUNDER SMOKE BLUE




ULTRA COPPER

PORCELAIN
 STONEWARE

-  HIGH MODULE OF BREAKAGE
-  RESISTANCE TO FROST
-  RESISTANCE TO ABRASION
-  LOW THERMAL EXPANSION
-  RESISTANT TO STAINS
-  LOW ABSORPTION
-  RESISTANT TO CHEMICAL
-  MINIMUM DEVIATION FROM EDGE
-  UNDER FLOOR HEATING



VOLGA WHITE

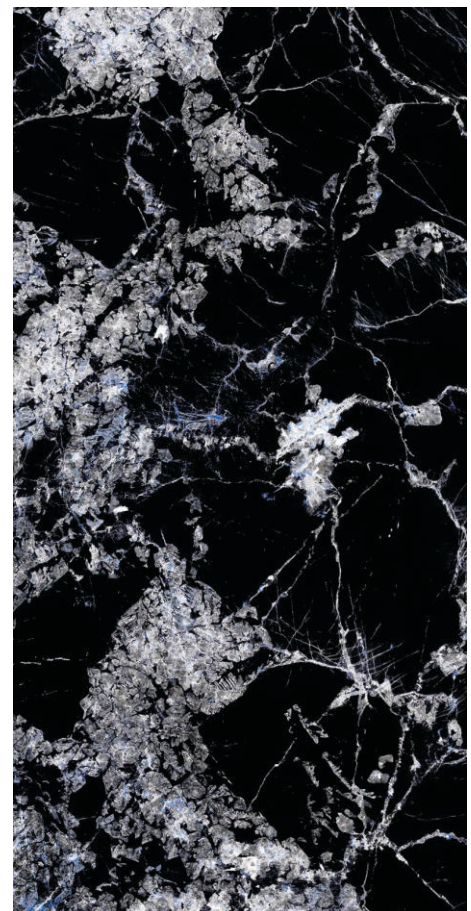

ZATT BEAUTY

Technical Specification /

| CHARACTERISTICS | STANDARD AS PER ISO-13006/EN14411 GROUP BLA | OUR VALUE | TEST METHOD |
|---|---|---------------------------|--------------|
| Regulatory Properties | | | |
| Deviation in Length & width | ±0.5% | ±0.3% | ISO-10545-2 |
| Deviation in thickness | ±0.5% | ±0.4% | ISO-10545-2 |
| Straightness in side | ±0.5% | ±0.1% | ISO-10545-2 |
| Rectangularity | ±0.5% | ±0.1% | ISO-10545-2 |
| Surface Flatness | ±0.5% | ±0.2% | ISO-10545-2 |
| Color Difference | Uniternd | No change | ISO-10545-16 |
| Glossiness | As per mfg. | Min 90% | GLOSSO METER |
| Structural Properties | | | |
| Water absorption | <0.50% | <0.05% | ISO-10545-3 |
| Apparent density | >2.0g/cc | >2.10g/cc | DIN 51082 |
| Messavie Mechanical Properties | | | |
| Modulu's of repture | -Min.35N/mm ² | Min. 40 N/mm ² | ISO-10545-4 |
| Breaking strength | Min. 1300 N | Min. 1800 N | ISO-10545-4 |
| Impact resistance | As per mfg. | Min. 0.55 | ISO-10545-5 |
| Surface mechanical Properties | | | |
| Resistance to surface abrasion (PEI rating) | As per mfg. | Min. Class-5 | ISO-10545-7 |
| MOH's hardness | As per mfg. | Min. 5 | EN 101 |
| Thermo Hygromrtric Properties | | | |
| Frost Resistance | No damage | No damage | ISO-10545-12 |
| Thermal shock resistance | No damage | No damage | ISO-10545-9 |
| Mosture expansion | Null | Null | ISO-10545-10 |
| Thermal expansion (COE) | Max.9.0x10 | Max. 6.5x10 ⁹ | ISO-10545-8 |
| Crazing resistance | As per mfg. | Min. 10 Cycle | ISO-10545-11 |
| Chemical Properties | | | |
| Chemical resistance | No damage | No damage | ISO-10545-13 |
| Stain resistance | Min. Class 3 | Min. Class5 | ISO-10545-14 |
| Safety Properties | | | |
| Slip resistance | As per mfg. | >0.40 | ISO-10545-17 |
| Fire resistance | As per mfg. | Fireproof | N.A. |
| Lead & Cafmum given off by glazes tiles | As per mfg. | Does not yield Pb & Cd | ISO-10545-15 |

Packing Detail /

| SIZE | PIECES/BOX | AREA/BOX | WEIGHT/BOX (Approx) |
|----------|------------|--------------|---------------------|
| 60x120cm | 2 pcs. | 1.44 Sq.Mtr. | 38 Kgs. |



e-mail : contact@topnotchtiles.com
web : www.topnotchtiles.com